

Extending the fatigue life of oilfield drilling equipment

www.cwst.co.uk

The majority of drill pipe failures occur as a result of metal fatigue. Fatigue fractures propagate as a result of cyclic stresses that are often far lower than the static design stress for the component. The fatigue damage is cumulative and permanent with cracks propagating until the remaining section is unable to withstand the application of a single load.

The problem for the equipment operator is that accumulated fatigue damage is extremely difficult to detect during standard inspection. When the damage is at a stage where it can be picked up it is likely to be extensive with the part already in a critical condition.

Factors effecting fatigue life:

- Mean tensile stress
- Stress amplitude
- Corrosive nature of the mud system
- Fatigue strength of material
- Pipe geometry
- Residual tensile stresses from the manufacturing process

Tensile residual stresses that are often introduced during manufacture sit close to the material surface and are effectively added to the operating stresses. These tensile residual stresses attempt to pull or tear the material apart accelerating crack propagation.


Extending Fatigue Life

The majority of failures have been found to occur around section changes, the position and geometry of these should therefore be carefully considered at the design stage. Materials with high fatigue strength should also be selected.

It is of course possible to extend the fatigue life of the equipment by operating it at reduced loads however, this may not be desirable.

One cost effective method of extending fatigue life is to carry out a controlled shot peening operation. Shot peening involves firing spherical media at the component surface in a controlled manner. The impacts produce spherical dimples in the material surface causing elastic plastic deformation. The overlapping dimples replace the harmful tensile stresses with a layer of compressive residual stress. The compressive layer helps to prevent the initiation and propagation of fatigue cracks by effectively reducing the applied load at the surface and sub surface.

When properly specified and applied the compressive layer produced by controlled shot

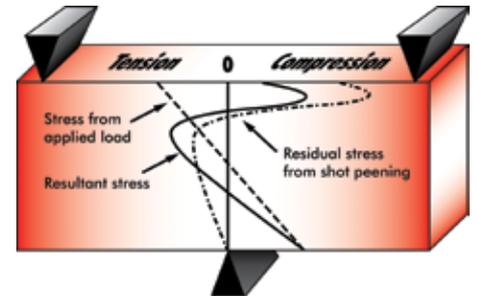

peening can be driven deep enough sub surface to sit below pre-existing and post-manufacturing initiation sites such as pits, scratches and notches.

Other fatigue failure modes such as stress corrosion cracking (SCC) and corrosion cracking can also be addressed by removing tensile stresses with controlled shot peening.

In addition to controlled shot peening at new manufacture stage, it is also possible to carry out blasting and shot peening of in-service parts to restore fatigue life, particularly if parts have been operating in a corrosive environment.

Controlled shot peening is a very economical and well proven method of extending fatigue life in Oilfield Drilling Equipment, Welded Structures, Pumps and Valves.

Neil Sheward
Technical Services Manager
Metal Improvement Company
Curtiss-Wright
Ascot Drive, Derby DE24 8ST

- Neil.sheward@cwst.com
- www.cwst.co.uk

Curtiss-Wright Surface Technologies, a single source for all your surface treatments. We pride ourselves on our experience, fast turnaround times and competitive pricing. Allow us to handle the logistics through our network of over 78 facilities worldwide.



Why should you choose Curtiss-Wright Surface Technologies (CWST) to deliver your surface treatments:

A worldwide supported network service of over 75 facilities, including on site field crews

We offer a diverse range of quality surface treatments including:

- Controlled shot peening
- Shot peen forming
- Laser peening
- Engineered coatings
- C.A.S.E.™ super finishing
- Surface texturing
- Material testing
- Repair and overhaul

Proud history of experience and innovation dating back to the Wright Brothers and Glen Curtiss who formed the Curtiss-Wright Corporation in 1929


As a single source for all your surface treatments we can improve your turnaround times and save you money

Customer's trust us to improve the performance, strength and life of their components, including the repair and overhaul of worn components

Long experience in protecting components from fatigue, corrosion, wear, galling, fretting and environmental attack in key industries

We maintain all appropriate customer and industry quality approvals including ISO 9001:2008, NADCAP, AS9100 Rev C and ISO 13485

Tailoring our services to meet your needs

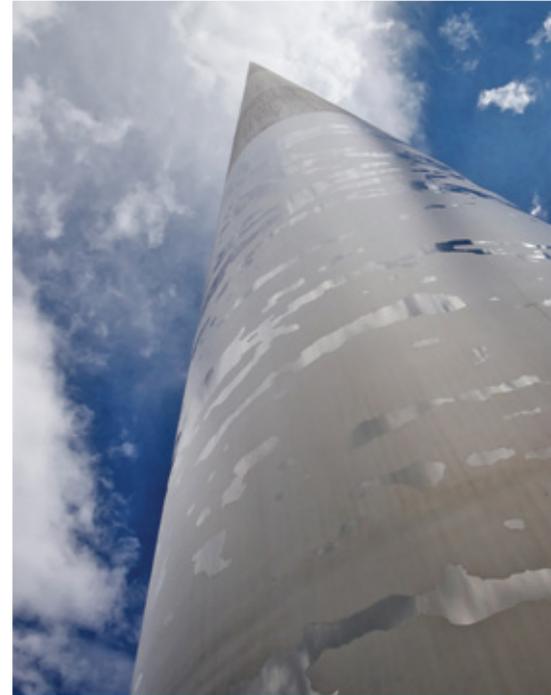

The Dublin Spire – a stunning example of our surface texturing technique showing the versatility of controlled shot peening

EUROPEAN CORPORATE OFFICE

Metal Improvement Company Curtiss-Wright

Hambridge Lane, Newbury
Berkshire RG14 5TU, UK

- T: +44 (0)1635 279621
- E: eurosales@cwst.com
- W: www.cwst.co.uk

USA COMPANY HQ

Metal Improvement Company Curtiss-Wright

80 Route 4 East, Suite 310
Paramus, New Jersey 07652, USA

- T: +1 (201) 843 7800
- E: info@cwst.com
- W: www.cwst.com

PARENT COMPANY HQ

Curtiss-Wright Corporation

13925 Ballantyne Corporate Place
Suite 400, Charlotte, NC 28277

- T: +1 (973) 541 3700
- F: +1 (973) 541 3699
- W: www.curtisswright.com

